


CONNECTON
fasteners for builders

CONNECTFLEX EPDM

Adhesive EPDM/Alu lead substitute

New !!
no bitume but EPDM

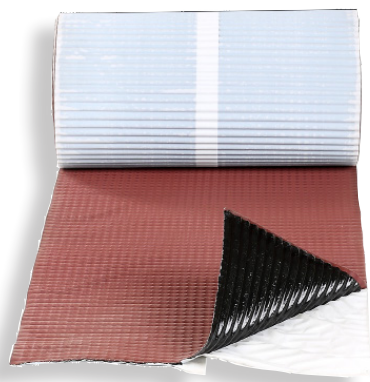

Specifications

Profiled adhesive EPDM reinforced with alu-mesh, 2,5mm

Roll width 300 mm - 450mm - 600mm

Roll length 5m or 10m

Weight/m² : 3,3kg

Colors : black Ral 9005, red Ral 8004, grey Ral 7037, anthracite Ral 7021, brown Ral 8017



Specifications


Smooth adhesive EPDM reinforced with alu-mesh, 2,5mm

Roll width 300 mm - 450mm - 600mm

Roll length 5m or 10m

Weight/m² : 3,3kg

Colors : black Ral 9005, red Ral 8004, grey Ral 7037, anthracite Ral 7021, brown Ral 8017



9005




8004



7037



7021



8017

CONNECTON

Rue des Tilleuls 5 • B-4920 Harzé • Tel : +32 (0)86 43 32 97 • Fax : +32 (0)86 43 39 45
www.connecton.be • info@connecton.be

Technical data sheet

Thickness	2,5mm
Width	300mm, 450mm, 600mm
Length	5m
Weight	3,3kg/m ²
Color	black, red, brown, grey, anthracite
Utilisation °C	-40 à 110°C



Properties in relation to Weathering

Norm	Description	Result
EN 13853 : 2004	Hail Resistance hard rigid backing (m/s) Hail Resistance soft backing (m/s)	≤ 22 ≤ 33
EN 495-5	Low Temperature Resistance	$\leq -30^{\circ}\text{C}$
EN 1107-2	Dimension Stability (%)	$\leq 0,1$ and $0,4$
EN 1297	UV Performance (3000hrs)	No effects of aging or damage

Norm	Description	Result	Report n°
EN 13501-1	Fire Classification	E	93/H/2012
EN ISO 11925-2/ AC:2011	Spread of Surface Fire	No flame No drops	
EN13956:2006	Flexible sheets for waterproofing. Plastic and rubber sheets for roof waterproofing Determination of Watertightness (10 kPa) Determination of Static load resistance (kg) Determination of Tensile strength (N/50mm) Determination of Impact Resistance (mm) Deter- mination of Elongation (%)	Pass ≤ 15 200 ≤ 300 ≥ 35	93/H/2012